

10/26/00
Jc685 U.S. PTO

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Attorney Docket No.

2000 1489A

Total Pages :

First Named Inventor or Application Identifier

Masaru FUSE

Express Mail Label No.:

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages -57]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total sheets -8]
4. ☒ Oath or Declaration [Total Pages - 3]
- a.1. ☒ Newly executed (original or copy)
- a.2. ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference
(usable if Box 4b is checked)
The entire disclosure of the prior application, from which
a copy of the oath or declaration is supplied under Box
4b, is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449
☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s)
☐ Statement filed in prior application, Status still proper and desired
15. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No.

18. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK, L.L.P.
2033 "K" Street, N.W.
Suite 800
Washington, D.C. 20006
Phone:(202) 721-8200
Fax:(202) 721-8250

October 26, 2000

The PTO did not receive the following
listed item(s) From Coversheet and
Assignment.

JC927 U.S. PTO
09/695883



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Masaru FUSE :
Serial No. NEW : Attn: APPLICATION BRANCH
Filed October 26, 2000 : Attorney Docket No. 2000_1489A
BURST OPTICAL COMMUNICATION
APPARATUS

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Attached hereto is a check in the amount of \$750.00 to cover Patent Office fees relating to filing the following attached papers:

New application \$710.00
Assignment for Recordal \$ 40.00

A duplicate copy of this paper is being submitted for use in the Accounting Division, Office of Finance.

The Commissioner is authorized to charge any deficiency or to credit any overpayment associated with this communication to Deposit Account No. 23-0975, with the EXCEPTION of deficiencies in fees for multiple dependent claims in new applications.

Respectfully submitted,

Masaru FUSE

By Charles R. Watts
Charles R. Watts
Registration No. 33,142
Attorney for Applicant

CRW/asd
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
October 26, 2000

[Check No. 40467]

2000_1489A

00695893 102540
009207 0056960

TITLE OF THE INVENTION

BURST OPTICAL COMMUNICATION APPARATUS

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to optical communication apparatuses for transmitting a burst signal, and more specifically, to an optical communication apparatus for transmitting a burst signal by selectively switching signal paths using a wavelength of the burst optical signal as address information.

Description of the Background Art

In one conventional art, a variable wavelength light source is provide as an light source to an optical communication circuit. This variable wavelength light source sends a burst-like optical signal using the wavelength thereof as address information. Further, a wavelength separator having output terminals each corresponding to a different wavelength is provided on an optical transmission line. With this structure, a high-speed, large-capacity burst optical communication apparatus capable of spontaneously and quickly switching signal paths in an optical domain can be achieved. One example of the above-structured optical communication apparatus is disclosed in detail in "Hyperspace Addressed Optical Access Architecture using Active

Arrayed Waveguide Gratings, F. Farjady, M. C. Parker, S. D. Walker, OECC98, 15A2-2, 1998.

FIG. 8 is a block diagram showing the structure of an optical communication apparatus according to the above background art.

5 In FIG. 8, the optical communication apparatus includes an optical transmitting circuit 510, and first and second optical receiving circuits 5111 and 5112. Between these transmitting and receiving circuits, bidirectional burst (intermittent) transmission is achieved.

10 The optical communication apparatus further includes an optical transmission line 505 for transmitting an optical signal, and a wavelength separator 506 for separating the transmitted optical signal into signals differed in wavelength from each other and outputting the signals to the corresponding first or second
15 optical receiving circuits 5111 and 5112.

The optical transmitting circuit 510 includes a baseband signal source 501 for outputting a signal that carries data to be transmitted, and a variable wavelength optical modulation unit 502 for converting the received signal into an optical signal.

20 The first optical receiving circuit 5111 includes a first optical receiver 5071 for converting the received optical signal into an electrical signal. Similarly, the second optical receiving circuit 5112 includes a second optical receiver 5072 for converting the incoming optical signal into an electrical
25 signal.

In the above structured optical communication apparatus, the baseband signal source 501 intermittently outputs, for example, a baseband digital signal. The variable wavelength optical modulation unit 502 includes a variable wavelength light source for outputting an optical signal of a predetermined wavelength. The variable wavelength optical modulation unit 502 modulates light outputted from the above variable wavelength light source with the baseband digital signal, and intermittently outputs a burst optical signal.

Here, the wavelength of the output light from the above variable wavelength light source is set to a first wavelength λ_1 during a period for transmitting the burst optical signal to the first optical receiver 5071, while being set to a second wavelength λ_2 during a period for transmitting the burst optical signal to the second optical receiver 5072.

The wavelength separator 506 is generally implemented as an AWG (Arrayed Wave Guide), and has two output ports, first and second. The wavelength separator 506 receives the optical signal transmitted through the optical transmission line 505, outputs signal components of the first wavelength from the first output port and those of the second wavelength from the second output port.

The first optical receiver 5071 is connected to the first output port of the wavelength separator 506, while the second optical receiver 5072 to the second output port thereof. The

first optical receiver 5071 receives the optical signal of the first wavelength $\lambda 1$ intermittently outputted from the first output port of the wavelength separator 506, and then converts the optical signal into an electrical signal for intermittent output. The second optical receiver 5072 receives the optical signal of the second wavelength $\lambda 2$ intermittently outputted from the second output port of the wavelength separator 506, and then converts the optical signal into an electrical signal for intermittent output.

As stated above, in the conventional optical communication apparatus, the variable wavelength light source is provided as a light source of the optical transmitting circuit. The optical transmitting circuit sends a burst-like optical signal using the wavelength thereof as address information. The wavelength separator having output terminals each corresponding to a different wavelength of the output signal is provided on the optical transmission line. With such structure, a high-speed, large-capacity burst optical communication apparatus capable of spontaneous and quick switching among signal transmission paths in an optical domain can be achieved.

However, such conventional optical communication apparatus is provided with only a single optical transmitting circuit. This optical transmitting circuit uses a baseband digital signal as a transmission signal. Therefore, if a plurality of such optical transmitting circuits are provided and simultaneously output

optical signals to a single optical receiving circuit, a collision occurs among these optical signals, and therefore these optical signals cannot be detected respectively. As a result, signal transmission cannot be achieved.

5

SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide a large-capacity burst optical communication apparatus capable of preventing a collision among lights outputted from a plurality of optical transmitting circuits.

The present invention has the following features to solve the problem above.

A first aspect of the present invention is directed to an optical communication apparatus for transmitting an intermittent optical signal from a transmitting side to a receiving side by using wavelength information of the optical signal as an address, the apparatus comprising:

m (m is a natural number not less than 2) optical transmitting circuits for sending the intermittent optical signal;

n (n is a natural number not less than 2) optical receiving circuits for receiving the optical signal from each of the optical transmitting circuits; and

an optical transfer circuit for connecting each of the optical transmitting circuits and each of the optical receiving

circuits, wherein

each of the optical transmitting circuits intermittently sends burst optical signals outputted by taking a provided intermittent signal as an original signal so as to prevent a collision among the burst optical signals,

the optical transfer circuit multiplexes the burst optical signals outputted from the optical transmitting circuits, separates the multiplexed burst optical signal into optical signals for every predetermined wavelength corresponding to the optical receiving circuits, and individually outputs the separated optical signals from n output ports provided thereto, and

each of the optical receiving circuits converts the optical signal outputted from a corresponding one of the output ports into an electrical signal and intermittently outputs the electrical signal.

In the above first aspect, even with a plurality of optical transmitting circuits, a burst optical communication apparatus capable of preventing a collision among the wavelengths of output lights from these optical transmitting circuits can be achieved.

According to a second aspect, in the first aspect, the optical communication apparatus further comprises a wavelength traffic manager, wherein

each of the optical transmitting circuits includes a variable wavelength optical modulator for converting the

intermittent signal into the burst optical signal, setting a wavelength thereof to any one of n predetermined varying wavelengths corresponding to the optical receiving circuits, and intermittently sending the burst optical signal,

5 the wavelength traffic manager controls the wavelengths of the burst optical signals sent from the variable wavelength optical modulators so as to prevent the wavelengths from coinciding with one another,

the optical transfer circuit includes

10 an optical multiplexer for multiplexing the burst optical signals outputted from the optical transmitting circuits and outputs a multiplexed optical signal;

 a wavelength separator for separating the multiplexed optical signal inputted from the optical multiplexer
15 into optical signals of the predetermined wavelengths corresponding to the optical receiving circuits, and individually outputs the separated optical signals from the n output ports, and

 each of the optical receiving circuits includes an optical
20 receiver for converting the optical signal outputted from the output port corresponding thereto of the wavelength separator into the electrical signal, and intermittently outputting the electrical signal.

 In the second aspect, the variable wavelength light source
25 is used as a light source in each of the optical transmitting

circuits. The optical transmitting circuits each send a burst-like optical signal by using the wavelength thereof as address information. Furthermore, the wavelength separator having output terminals each corresponding to a different wavelength is provided on the optical transmission line. Further, the wavelengths from the plurality of optical transmitting circuits are controlled so as not to coincide with one another. Thus, a burst optical communication apparatus capable of spontaneously and quickly switching signal transmission paths in an optical domain can be achieved.

According to a third aspect, in first aspect,

each of the optical transmitting circuits includes

a carrier modulator for modulating a carrier having a frequency unique to each of the optical transmitting circuits with the intermittent input signal to generate a burst modulated signal, and intermittently outputting the burst modulated signal, and

a variable wavelength optical modulator for converting the burst modulated signal from the carrier modulator into a burst optical signal, setting a wavelength thereof to any one of n predetermined varying wavelengths corresponding to the optical receiving circuits, and intermittently sending the burst optical signal,

the optical transfer circuit includes

an optical multiplexer for multiplexing the burst optical

signals outputted from the optical transmitting circuits and outputting a multiplexed optical signal;

5 a wavelength separator for separating the multiplexed optical signal inputted from the optical multiplexer into optical signals of the predetermined wavelengths corresponding to the optical receiving circuits, and individually outputting the separated optical signals from the n output ports, and

10 each of the optical receiving circuits includes an optical receiver for converting the optical signal outputted from the output port corresponding thereto in the wavelength separator into an electrical signal, and intermittently outputting the electrical signal,

15 a filter for receiving the electrical signal intermittently outputted from the optical receiver, selectively passing any one of the burst modulated signals from the m optical transmitting circuits based on the received electrical signal, and intermittently outputting the passed burst modulated signal, and

20 a burst demodulator for demodulating the burst modulated signal intermittently outputted from the filter.

In the third aspect, the optical transmitting circuits are each assigned a different carrier frequency. The optical receiving circuits are each structured to select a desired
25 frequency. Thus, separation and extraction of each transmission

signal can be achieved even when a plurality of optical signals are simultaneously inputted from the optical transmitting circuits to any single optical receiving circuit. Moreover, burst communications can be achieved by a convenient structure without complicated wavelength management among the optical transmitting circuits.

According to a fourth aspect, in the third aspect, the optical communication apparatus further comprises an optical sub-transmitting circuit, wherein

the optical sub-transmitting circuit includes

a carrier generator for multiplexing reference carriers that are equal in frequency to and have a predetermined relation in phase with the carriers unique to the optical transmitting circuits and, and outputting a multiplexed signal,

an optical sub-modulator for converting the multiplexed signal outputted from the carrier generator into an optical signal having a predetermined wavelength that is different from the n predetermined varying wavelengths corresponding to the optical receiving circuits, and sending the optical signal,

the optical multiplexer multiplexes the burst optical signals outputted from the optical transmitting circuits and the optical signal outputted from the optical sub-transmitting circuit, and outputs a multiplexed optical signal,

the wavelength separator separates the multiplexed optical

signal outputted from the optical multiplexer into optical signals for each of the predetermined wavelengths corresponding to the n optical receiving circuits and an optical signal having a wavelength equal to the wavelength of the optical signal sent
5 from the optical sub-modulator, and individually outputs the separated optical signals from the n output ports and a carrier output port provided thereto,

each of the optical receiving circuits further includes
an optical sub-receiver for converting the optical
10 signal outputted from the carrier output port of the wavelength separator into an electrical signal, and outputting the electrical signal, and

a sub-filter for receiving the electrical signal outputted from the optical sub-receiver, selectively passing any
15 one of the m reference carriers, and outputting the passed reference carrier, and

the burst demodulator demodulates the burst modulated signal intermittently outputted from the filter with reference to the reference carrier outputted from the sub-filter.

20 In the fourth aspect, a carrier (unmodulated signal) used in each optical transmitting circuit is transmitted from an additionally provided optical transmitting circuit to each optical receiving circuit as an optical signal of a dedicated wavelength. With reference to the carrier, each optical
25 receiving circuit demodulates the signal transmitted from the

optical transmitting circuit. Thus, the demodulation circuit for intermittently-transmitted modulated signals can be made simple in structure, and large-capacity burst transmission can be achieved with such simple structure.

5 According to a fifth aspect, in the fourth aspect, the burst modulated signal is generated by any one of frequency modulation and phase modulation.

 In the fifth aspect, a frequency-modulated signal or phase-modulated signal is used as a signal to be transmitted from
10 each optical transmitting circuit. Thus, the CNR (carrier-to-noise ratio) can be improved, and thereby higher-quality signal transmission can be achieved.

 According to a sixth aspect, in the fifth aspect, the burst demodulator carries out synchronous detection of
15 the burst modulated signal intermittently outputted from the filter with reference to the reference carrier outputted from the filter.

 In the sixth aspect, a frequency-modulated signal or phase-modulated signal is used as a signal to be transmitted from
20 each optical transmitting circuit. Further, each optical receiving circuit demodulates the modulated signal by carrying out synchronous detection using the carrier individually transmitted from each optical transmitting circuit. Thus, higher-quality signal transmission can be achieved with a simple
25 structure.

According to a seventh aspect, in the third aspect,
the carrier modulator modulates the carrier having the
frequency unique to each of the optical transmitting circuits to
generate the burst modulated signal and intermittently outputs
5 the burst modulated signal and the carrier,
each of the optical transmitting circuits further includes
an optical sub-modulator for converting the carrier outputted
from the carrier modulator into an optical signal having a
predetermined wavelength that is different from n predetermined
10 varying wavelengths corresponding to the optical receiving
circuits, and sending the optical signal,
the optical multiplexer multiplexes the burst optical
signals from variable wavelength optical modulator included in
each of the optical transmitting circuits and the optical signal
15 from the optical sub-modulator, and outputs a multiplexed optical
signal,
the wavelength separator separates the multiplexed optical
signal outputted from the optical multiplexer into optical
signals for each of the predetermined wavelengths corresponding
20 to the n optical receiving circuits and an optical signal having
a wavelength equal to the wavelength of the optical signal sent
from the optical sub-modulator, and individually outputs the
separated optical signals from the n output ports and a carrier
output port provided thereto,
25 each of the optical receiving circuits further includes

an optical sub-receiver for converting the optical signal outputted from the carrier output port of the wavelength separator into an electrical signal, and outputting the electrical signal, and

5 a sub-filter for receiving the electrical signal outputted from the optical sub-receiver, selectively passing any one of the m reference carriers based on the received electrical signal, and outputting the passed reference carrier, and

the burst demodulator demodulates the burst modulated
10 signal intermittently outputted from the filter with reference to the reference carrier outputted from the sub-filter.

In the seventh aspect, each optical transmitting circuit is provided with an additional optical modulation circuit for transmitting a carrier (unmodulated signal). The additional
15 optical modulation circuit transmits the carrier as an optical signal of a dedicated wavelength. With reference to this carrier, each optical receiving circuit demodulates the signal transmitted from each optical transmitting circuit. Thus, the demodulation circuit for intermittently-transmitted modulated signals can be
20 made simple in structure, and burst transmission can be achieved with such simple structure.

According to an eighth aspect, in the seventh aspect,

the burst modulated signal is generated by any one of frequency modulation and phase modulation.

25 In the eighth aspect, a frequency-modulated signal or

phase-modulated signal is used as a signal to be transmitted from each optical transmitting circuit. Thus, the CNR (carrier-to-noise ratio) can be improved, and thereby higher-quality signal transmission can be achieved.

5 According to a ninth aspect, in the eighth aspect, the burst demodulator carries out synchronous detection of the burst modulated signal intermittently outputted from the filter with reference to the reference carrier outputted from the sub-filter.

10 In the ninth aspect, a frequency-modulated signal or phase-modulated signal is used as a signal to be transmitted from each optical transmitting circuit. Further, each optical transmitting circuit demodulates the modulated signal by carrying out synchronous detection using the carrier separately
15 transmitted from each optical transmitting circuit. Thus, higher-quality signal transmission can be achieved with a simple structure.

 According to a tenth aspect, in the third aspect, each of the optical receiving circuits further includes a
20 monitor for monitoring the electrical signal outputted from the optical receiver to determine whether the burst modulated signal from each of the optical transmitting circuits is present or not, and, if present, controls the filter to selectively passing a predetermined burst modulated signal for output.

25 In the tenth aspect, each optical receiving circuit keeps

monitoring whether the burst modulated signal is transmitted from each optical transmitting circuit, and then adaptively controls the frequency band to be passed by the filter. Thus, more efficient burst transmission can be achieved.

5 According to an eleventh aspect, in the third aspect, the filter and the burst demodulator are provided as many as the m optical transmitting circuits in each of the optical receiving circuits, and

each of the filters selectively passes a different one of
10 the burst modulated signals from the m optical transmitting circuits, and intermittently outputs the passed burst modulated signal.

In the eleventh aspect, each optical receiving circuit is provided with m filters and m burst demodulators that correspond
15 to the optical transmitting circuits. Thus, larger-capacity burst transmission can be achieved.

These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when
20 taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing the structure of an optical communication apparatus according to a first embodiment of the
25 present invention;

FIG. 2 is a block diagram showing the structure of an optical communication apparatus according to a second embodiment of the present invention;

FIGS. 3a to 3d are schematic diagrams for each explaining
5 a relation between carrier frequencies and optical wavelengths of transmission signals in the optical communication apparatus according to the second embodiment of the present invention;

FIG. 4 is a block diagram showing an optical communication apparatus according to a third embodiment of the present
10 invention;

FIG. 5 is a block diagram showing an optical communication apparatus according to a fourth embodiment of the present invention;

FIG. 6 is a block diagram showing an optical communication
15 apparatus according to a fifth embodiment of the present invention;

FIG. 7 is a block diagram showing an optical communication apparatus according to a sixth embodiment of the present invention; and

20 FIG. 8 is a block diagram showing the structure of a conventional optical communication apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

(First Embodiment)

25 FIG. 1 is a block diagram showing the structure of an optical

communication apparatus according to a first embodiment of the present invention. In FIG. 1, the optical communication apparatus includes first and second optical transmitting circuits 5101 and 5102, and the first and second optical receiving circuit 5111 and 5112. Such structure allows the optical communication apparatus to achieve bidirectional burst (intermittent) transmission between these transmitter and receiver circuits. Note that, in FIG. 1, components that are identical in structure to those in FIG. 8 are provided with the same reference numerals.

The optical communication apparatus further includes a wavelength traffic manager 503 for managing the wavelengths of optical signals from first and second variable wavelength optical modulators 5021 and 5022, an optical multiplexer 504 for multiplexing optical signals from the first and second variable wavelength optical modulators 5021 and 5022, and the wavelength separator 506 for separating the received signals by wavelength to output the separated signals to the first and second optical receiving circuits 5111 and 5112.

The first optical transmitting circuit 5101 includes a first baseband signal source 5011 for outputting a signal that carries data to be transmitted, and a first variable wavelength optical modulator 5021 for converting an input signal into an optical signal. Similarly, the second transmitter circuit 5102 includes a second baseband signal source 5012 for outputting a signal that carries data to be transmitted, and a second variable

wavelength optical modulator 5022 for converting an input signal into an optical signal. The first and second optical receiving circuit 5111 and 5112 are identical in structure to those with the same reference numerals in the conventional optical communication apparatus shown in FIG. 8, and therefore not described herein.

In the above structured optical communication apparatus, each of the first and second baseband signal sources 5011 and 5012 intermittently outputs, for example, a baseband digital signal. Note that the first and second baseband signal sources 5011 and 5012 are just an example of sources for generating baseband signals. These components are omitted, as a matter of course, if baseband signals are provided from the outside of the optical communication apparatus, for example.

The first and second variable wavelength optical modulators 5021 and 5022 are provided so as to correspond to the first and second baseband signal sources 5011 and 5012, respectively, and each include a variable wavelength light source capable of varying the wavelength of the optical signal to be outputted. The first and second variable wavelength optical modulators 5021 and 5022 each modulate the light from the corresponding variable wavelength light source with the baseband digital signal from the corresponding baseband signal source, and intermittently output first and second burst optical signal, respectively.

Here, the wavelength of the output light from the variable

wavelength light sources is set to a first wavelength λ_1 during a predetermined period for transmitting the burst optical signal to the first optical receiver 5071, and to a second wavelength λ_2 during a predetermined period for transmitting it to the second
5 optical receiver 5072.

The optical multiplexer 504 multiplexes the first burst optical signal from the first variable wavelength optical modulator 5021 and the second burst optical signal from the second variable wavelength optical modulator 5022. The optical
10 multiplexer 504 then sends the multiplexed optical signal to the optical transmission line 505. Note that the wavelength separator 506 and the first and second optical receivers 5071 and 5072 are identical in structure and operation to those in the conventional optical communication apparatus shown in FIG. 8, and
15 therefore not described herein.

The wavelength traffic manager 503 controls the first and second burst optical signals from the first and second variable wavelength optical modulators 5021 and 5022 to differ from each other in wavelength. Such control prevents the first and second
20 burst optical signals from being simultaneously inputted to the first or second optical receiver 5071 or 5072.

As stated above, in the optical communication apparatus, the variable wavelength light sources are used as the light sources of the plurality of optical transmitting circuits. The
25 optical transmitting circuits each send a burst-like optical

signal using the wavelength thereof as address information, to the optical transmission line on which a wavelength separator having output terminals each corresponding to a different wavelength is provided. With such structure, the burst optical communication apparatus capable of spontaneously and quickly switching signal transmission paths in an optical domain can be achieved.

(Second Embodiment)

An optical communication apparatus according to a second embodiment is the one that solves problems of the optical communication apparatus according to the first embodiment, which are now described first.

The optical communication apparatus according to the first embodiment uses a baseband digital signal as the transmission signal. Therefore, if optical signals from a plurality of optical transmitting circuits are simultaneously provided to a single optical receiving circuit, a collision occurs among the transmission signals, and therefore these optical signals cannot be detected. To solve this problem, as stated above, the burst optical signals from the optical transmitting circuits are managed so as not to be simultaneously identical in wavelength, that is, to always differ from each other in wavelength. However, this management makes the system structure complicated. Moreover, if the optical transmitting circuits are placed apart from each other, dedicated lines are required thereamong to

communicate information for controlling the wavelengths. This requirement makes the system structure more complicated.

Further, in the optical communication apparatus according to the first embodiment, the wavelength that is being used by one optical transmitting circuit cannot be used by the others. This restricts the total traffic-capacity of the optical communication apparatus.

Therefore, a large-capacity burst optical communication apparatus capable of simultaneously using the same wavelength without requiring wavelength management in a plurality of optical transmitting circuits is highly preferable. With reference to FIG. 2, the structure and operation of such optical communication apparatus according to the second embodiment of the present invention is now described.

In FIG. 2, the optical communication apparatus of the present embodiment includes first and second optical transmitting circuits 1101 and 1102, and first and second optical receiving circuits 1111 and 1112.

The optical communication apparatus of the present embodiment further includes an optical multiplexer 104 for multiplexing lights from the first and second optical transmitting circuits 1101 and 1102, an optical transmission line 105 for transmitting the multiplexed light, and a wavelength separator 106 for separating a received light from the optical transmission line 105.

The first optical transmitting circuit 1101 includes a first baseband signal source 1011 for outputting a baseband signal that carries data to be transmitted, a first carrier modulator 1021 for modulating a carrier with the baseband signal, and a first variable wavelength optical modulator 1031 for converting an electrical signal from the first carrier modulator 1021 into an optical signal.

Similarly, the second transmitter circuit 1102 includes a second baseband signal source 1012 for outputting a baseband signal carrying data to be transmitted, a second carrier modulator 1022 for modulating a carrier the baseband signal, and a second variable wavelength optical modulator 1032 for converting an electrical signal from the second carrier modulator 1022 into an optical signal. Note that, as stated above, the first and second baseband signal sources 1011 and 1012 are omitted if baseband signals are intermittently inputted from the outside of the optical communication apparatus.

The first optical receiving circuit 1111 includes a first optical receiver 1071 for converting the received optical signal into an electrical signal, a first filter 1081 for passing only signal components of a predetermined frequency, and a first burst demodulator 1091 for demodulating the passed signal.

Similarly, the second optical receiving circuit 1112 includes a second optical receiver 1072 for converting the input optical signal into an electrical signal, a second filter 1082

for passing only signal components of a predetermined frequency, and a second burst demodulator 1092 for demodulating the passed signal.

First, the operation of the optical communication apparatus shown in FIG. 2 is described. Each of the first and second baseband signal sources 1011 and 1012 intermittently outputs, typically, a baseband digital signal (pulse signal).

The first and second carrier modulators 1021 and 1022 are provided so as to correspond to the first and second baseband signal sources 1011 and 1012, respectively. The first and second carrier modulators 1021 and 1022 each modulate the carrier with the baseband digital signal intermittently outputted from the corresponding baseband signal source, and intermittently output the digital modulated signal (for example, 64QAM signal).

The first and second carrier modulators 1021 and 1022 use a carrier having a predetermined first frequency f_1 and a carrier having a predetermined second frequency f_2 respectively that are different from each other.

The first and second variable wavelength optical modulators 1031 and 1032 are provided so as to correspond to the first and second carrier modulators 1021 and 1022, respectively, and each include a light source capable of varying the wavelength of the output light.

The first and second variable wavelength modulators 1031 and 1032 each modulate the light from the corresponding light

source with the digital modulated signal from the corresponding carrier modulator, and output first and second burst optical signals, respectively.

FIG. 3a and 3b schematically show the structures of the first burst optical signal outputted from the first variable wavelength optical modulator 1031 and the second burst optical signal outputted from the second variable wavelength optical modulator 1032, respectively. In these drawings, $\lambda 1$ represents the wavelength of the first optical signal, while $\lambda 2$ represents the wavelength of the second optical signal. (f1) and (f2) each represent a carrier frequency of the digital modulated signal.

The optical multiplexer 104 multiplexes the first burst optical signal from the first variable wavelength optical modulator 1031 and the second burst optical signal from the second variable wavelength optical modulator 1032, and sends the multiplexed optical signal to the optical transmission line 105.

The wavelength separator 106 is implemented as an AWG, for example, having two output ports, first and second. Components of the predetermined first wavelength ($\lambda 1$) included in the optical signal coming through the optical transmission line 105 are outputted from the first output port, while components of the predetermined second wavelength ($\lambda 2$) from the second output port. Since the first and second burst optical signals are both intermittently outputted, the transmitted optical signal does not always include both components of the predetermined first

wavelength ($\lambda 1$) and the predetermined second wavelength ($\lambda 2$).

FIGS. 3c and 3d schematically show the structures of the optical signals from the first and second output ports, respectively, of the wavelength separator 106, together with
5 their wavelength and carrier frequencies.

The first optical receiver 1071 is connected to the first output port of the wavelength separator 106, while the second optical receiver 1072 to the second output port thereof. The first optical receiver 1071 receives the optical signal having
10 the first wavelength ($\lambda 1$) intermittently outputted from the first output port of the wavelength separator 106, and converts into an electrical signal for intermittent output. The second optical receiver 1072 receives the optical signal having the second wavelength ($\lambda 2$) intermittently outputted from the second output
15 port of the wavelength separator 106, and converts into an electrical signal for intermittent output.

The first and second filters 1081 and 1082 are provided so as to correspond to the first and second optical receivers 1071 and 1072, respectively. These filters 1081 and 1082 each pass
20 only the components of a signal having a predetermined frequency included in the electrical signal outputted from the corresponding optical receiver for output.

The first and second burst demodulators 1091 and 1092 are provided so as to correspond to the first and second filters 1081
25 and 1082, respectively. These burst demodulators 1091 and 1092

each receive the digital modulated signal intermittently outputted from the corresponding filter and demodulate the digital demodulated signal for output.

Here, the operation of the first and second variable wavelength optical modulators 1031 and 1032 is described in more detail. The first and second variable wavelength optical modulators 1031 and 1032 control the wavelength of the output optical signal based on where to transmit the signal, that is, the first or second optical receiving circuit 1111 or 1112.

More specifically, the first and second variable wavelength optical modulators 1031 and 1032 each set the wavelength of the optical signal to $\lambda 1$ for transmitting the optical signal to the first optical receiving circuit 1111, while setting to $\lambda 2$ for transmitting it to the second optical receiving circuit 1112.

Such operation of the first and second variable wavelength optical modulators 1031 and 1032 enables the wavelength separator 106 to spontaneously select a path for the optical signal as described above. Therefore, only the optical signal having the wavelength $\lambda 1$ is transmitted to the first optical receiver 1071, while only the one having the wavelength $\lambda 2$ is transmitted to the second optical signal receiver 1072.

Next, the operation of the first and second filters 1081 and 1082 is described in more detail. The first and second filters 1081 and 1082 control a passband frequency based on from which the optical receiving circuit should receive the signal, that is,

the first or second optical transmitting circuit 1101 or 1102.

More specifically, the first and second filters 1081 and 1082 each set the passband frequency to f_1 for receiving the signal from the first optical transmitting circuit 1101, while setting
5 to f_2 for receiving from the second optical transmitting circuit 1102. Typically, the first and second filters 1081 and 1082 each selectively receive, at predetermined intervals, the signal from the first and second optical transmitting circuits 1101 and 1102.

Such operation of the first and second filters 1081 and 1082
10 enables separation and selection among the signals simultaneously provided from the first and second optical transmitting circuits 1101 and 1102 to a single optical receiving circuit.

Now consider a case where the first and second optical transmitting circuits 1101 and 1102 simultaneously transmit
15 signals to a single optical receiving circuit, for example, the first optical receiving circuit 1111. In such case, the first filter 1081 included in the first optical receiving circuit 1111 selects any one of digital modulated signals, for example, a digital modulated signal outputted from the first optical
20 transmitting circuit 1101. This digital modulated signal is demodulated by the burst demodulator 1091. Thus, signal transmission is established between the first optical transmitting circuit 1101 and the first optical receiving circuit 1111.

25 Therefore, the other digital modulated signal not selected

by the first filter 1081, that is, the one outputted from the second optical transmitting circuit 1102, is not used. Thus, signal transmission is not established between the second optical transmitting circuit 1102 and the first optical receiving circuit 1111.

In such case, the second optical transmitting circuit 1102 re-transmits the abandoned digital modulated signal automatically or responding to a notification from the first optical receiving circuit 1111 via a transmission line not shown. With this operation, signal transmission can be established between the second optical transmitting circuit 1102 and the first optical receiving circuit 1111.

As described above, according to the present embodiment, each of the optical transmitting circuits is assigned different carrier frequencies, and the passband frequency in the optical receiving circuit is variably controlled according to the optical transmitting circuit from which the optical receiving circuit should receive information. Thus, information can be easily separated and extracted even if optical signals are simultaneously provided from a plurality of optical transmitting circuits to a single receiver circuit. Moreover, according to the present embodiment, complicated wavelength management among the optical transmitting circuits is not required. Therefore, the burst optical communication apparatus for performing high-speed, large-capacity optical information transmission and

exchanges based on optical signal processing can be easily achieved.

(Third Embodiment)

With reference to FIG. 4, the structure of an optical communication apparatus according to a third embodiment of the present invention is described. In FIG. 4, the optical communication apparatus of the present embodiment includes the first and second optical transmitting circuits 1101 and 1102, an optical sub-transmitter circuit 3103, and first and second optical receiving circuits 3111 and 3112. Note that, in FIG. 4, components that are identical in structure to those in FIG. 2 are provided with the same reference numerals.

The optical communication apparatus of the present embodiment further includes an optical multiplexer 304 for multiplexing lights from the first and second optical transmitting circuits 1101 and 1102 and the optical sub-transmitter circuit 3103, the optical transmission line 105 for transmitting the multiplexed light, and a wavelength separator 306 for separating the light from the optical transmission line 105.

The first and second optical transmitting circuits 1101 and 1102 in the optical communication apparatus of the present invention are identical in structure to those in the optical communication apparatus of the second embodiment, and therefore not described herein.

The optical sub-transmitter circuit 3103 includes a carrier generator 3010 for simultaneously outputting signals that are equal in frequency to the carriers used for generating modulated signals outputted from the first and second carrier modulators 1021 and 1022, and an optical sub-modulator 3011 for converting the signal outputted from the carrier generator 3010 into an optical signal.

The first optical receiving circuit 3111 includes the first optical receiver 1071 and a first optical sub-receiver 30121 both for converting an input optical signal into an electrical signal, the first filter 1081 and a first sub-filter 30131 both for passing signal components of a predetermined frequency, and a first burst demodulator 3091 for demodulating an input signal from the first filter 1081 with an input signal from the first sub-filter 30131.

Similarly, the second optical receiving circuit 3112 includes the second optical receiver 1072 and a second optical sub-receiver 30122 both for converting an input optical signal into an electrical signal, the second filter 1082 and a second sub-filter 30132 both for passing signal components of a predetermined frequency, and a second burst demodulator 3092 for demodulating an input signal from the second filter 1082 with an input signal from the second sub-filter 30132.

The operation of the optical communication apparatus of the present embodiment shown in FIG. 4 is now described. Since the structure of the present optical communication apparatus is

similar to that in the second embodiment, only the differences therebetween are described below.

The carrier generator 3010 multiplexes signals that are equal in frequency to and have a predetermined relation in phase
5 with all carriers used for generating digital modulated signals in the first and second carrier modulators 1021 and 1022, that is, carriers having frequencies f_1 and f_2 .

The optical sub-modulator 3011 includes a light source for outputting a light having a predetermined third wavelength (λ
10 c), and converting the carriers having the frequencies f_1 and f_2 outputted from the carrier generator 3010 into optical signals for output. The outputted signals are not intermittent burst optical signals but successive optical signals.

The optical multiplexer 304 multiplexes the first burst
15 optical signal outputted from the first variable wavelength optical modulator 1031, the second burst optical signal outputted from the second variable wavelength optical modulator 1032, and the optical signal outputted from the optical sub-modulator 3011, and sends the multiplexed signal to the optical transmission line
20 105.

The wavelength separator 306 is implemented as an AWG, for example, having three output ports, first to third. The wavelength separator 306 outputs components of the predetermined first wavelength (λ_1) included in the optical signal transmitted
25 through the optical transmission line 105 from the first output

port, those of the predetermined second wavelength (λ_2) from the second output port. Needless to say, the first and second burst optical signals are intermittently outputted, and therefore the transmitted optical signal does not always include components of both the first and second wavelengths (λ_1, λ_2). The wavelength separator 306 outputs components of a predetermined third wavelength (λ_c) that are always included in the transmitted optical signal from the third output port.

The first and second optical sub-receivers 30121 and 30122 are each connected to the third output port of the wavelength separator 306. These optical sub-receivers 30121 and 30122 each receives the optical signal having the third wavelength (λ_c) and converting it to an electrical signal.

The first and second sub-filter 30131 and 30132 are provided so as to correspond to the first and second optical sub-receivers 30121 and 30122, respectively. These sub-filters 30131 and 30132 each selectively pass carriers having the predetermined frequency f_1 or f_2 from among the electrical signals outputted from the corresponding optical sub-receiver.

The first and second burst demodulators 3091 and 3092 each demodulate the digital modulated signal intermittently outputted from the corresponding filter with reference to the carrier also outputted from the corresponding sub-filter into a baseband digital signal.

The operation of the first and second sub-filters 30131 and

30132 is now described in more detail. Similarly to the first and second filters 1081 and 1082, the first and second sub-filters 30131 and 30132 each control the passband frequency depending on the optical transmitting circuit from which the optical receiving
5 circuit should receive the signal.

More specifically, in order to receive the signal from the first optical transmitting circuit 1101, the first and second sub-filters 30131 and 30132, and their corresponding filters each set the passband frequency to f_1 . On the other hand, in order
10 to receive the signal from the second optical transmitting circuit 1102, these sub-filters 30131 and 30132, and their corresponding filters each set the passband frequency to f_2 . With this operation, the first and second sub-filters 30131 and 30132 each provide successively inputted carriers together with
15 intermittently inputted digital modulated signals to each corresponding burst demodulator to cause easy, quick demodulation.

This demodulation process is now described in more detail. If the above-described structure of the present embodiment is not
20 used, the carrier required for demodulating the digital modulated signal is provided generally by an oscillation circuit built in the burst demodulator, for example, a PLL circuit. However, the digital modulated signal is inputted intermittently only. Therefore, a shift occurs in frequency and phase of the carrier
25 generated by the PLL circuit, while the modulated signal is not

inputted. Therefore, the carrier generated by the PLL circuit has to be correctly adjusted in frequency and phase when the modulated signal is inputted.

The intermittently-inputted digital modulated signal is, however, often very short. Therefore, in general, time cannot be taken enough for adjustment in frequency and phase. To make such adjustment possible in this case, extremely complicated structure is required for the apparatus.

Thus, according to the structure of the present embodiment in which signals similar to the carriers are successively provided, the intermittently-inputted digital modulated signal can be demodulated instantaneously with more convenient structure.

As stated above, according to the present embodiment, each optical transmitting circuit successively transmits a signal similar to the carrier for generating a digital modulated signal to each optical receiving circuit. Therefore, the burst optical communication apparatus capable of demodulating the intermittently-transmitted digital modulated signal more easily and quickly.

(Fourth Embodiment)

With reference to FIG. 5, the structure of an optical communication apparatus according to a fourth embodiment of the present invention is now described. In FIG. 5, the optical communication apparatus of the present invention includes the first and second optical transmitting circuits 4101 and 4102, and

first and second optical receiving circuits 3111 and 3112. Note that, in FIG. 5, components that are identical in structure to those in FIG. 4 are provided with the same reference numerals.

The optical communication apparatus of the present
5 embodiment further includes an optical multiplexer 404 for multiplexing two signals outputted from the first optical transmitting circuit 4101 and two signals outputted from the second optical transmitting circuit 4102, the optical transmission line 105, and the wavelength separator 306 for
10 separating an input light from the optical transmission line 105.

The first optical transmitting circuit 4101 includes the first baseband signal source 1011 for outputting a baseband signal that carries data to be transmitted, the first carrier modulator 4021 for modulating a carrier with the baseband signal, a first
15 variable wavelength optical modulator 1031 for converting an electrical signal from the first carrier modulator 4021 into an optical signal, and a first optical sub-modulator 40111.

Similarly, the second optical transmitting circuit 4102 includes the second baseband signal source 1012 for outputting
20 a baseband signal that carries data to be transmitted, a second carrier modulator 4022 for modulating a carrier with the baseband signal, the second variable wavelength optical modulator 1032 for converting an electrical signal from the second carrier modulator 4022 into an optical signal, and a second optical sub-modulator
25 40112.

Note that the first and second optical receiving circuits 3111 and 3112 are identical in structure to those in the optical communication apparatus of the above third embodiment, and therefore not described herein.

5 The operation of the optical communication apparatus according to the fourth embodiment shown in FIG. 5 is now described. Since the optical communication apparatus of the present embodiment is similar in structure to that in the third embodiment, only the difference therebetween is now described below. Note
10 that, as stated above, the first and second baseband signal sources 1011 and 1012 can be omitted.

 The first and second carrier modulators 4021 and 4022 are provided so as to correspond to the first and second baseband signal sources 1011 and 1012. The first and second carrier
15 modulators 4021 and 4022 use carriers having a predetermined first frequency f_1 and a predetermined second frequency f_2 , respectively, that are different from each other, to intermittently output digital modulated signals, and also output unmodulated carriers.

20 The first and second optical sub-modulators 40111 and 40112 are provided so as to correspond to the first and second carrier modulators 4021 and 4022, and each include a light source for outputting a light of the predetermined third wavelength (λ_c). The first and second optical sub-modulators 40111 and 40112
25 convert the carriers outputted from the first and second carrier

modulators 4021 and 4022, respectively, into optical signals.

The optical multiplexer 404 multiplexes two burst optical signals outputted from the first and second variable wavelength optical modulators 1031 and 1032 and two optical signals outputted
5 from the first and second optical sub-modulators 40111 and 40112 all together, and sends the multiplexed signal to the optical transmission line 105.

The operation of the receiving side in the present embodiment is similar to that in the third embodiment. However,
10 the carriers inputted from the first and second sub-filters 30131 and 30132 to the first and second burst demodulators 3091 and 3092 are more correct in frequency and phase than those in the third embodiment.

More specifically, in the optical communication apparatus
15 of the third embodiment, there is a high possibility that the signal outputted from the carrier generator 3010 included in the optical sub-transmitter circuit 3103 is slightly different in frequency and phase from the signals outputted from the first and second carrier modulators 1021 and 1022 because these signals are
20 generated by different sources. On the other hand, in the optical communication apparatus of the present embodiment, the signals inputted to the first and second burst demodulators 3091 and 3092 are originally generated by the first and second carrier modulators 4021 and 4022, and therefore are exactly the same in
25 frequency and phase as the carriers generated by the first and

second carrier modulators 4021 and 4022.

Therefore, the optical communication apparatus of the present embodiment can carry out more correct demodulation than that of the third embodiment, even though the structure is slightly complicated.

As stated above, according to the present embodiment, each optical transmitting circuit extracts a carrier for generating a digital modulated signal in each optical transmitting circuit, and outputs the carrier to each optical receiving circuit. Thus, the burst optical communication apparatus capable of easily and correctly demodulating an intermittently-transmitted digital modulated signal can be achieved.

Note that the optical communication apparatus of the present embodiment includes the first and second optical sub-modulators 40111 and 40112 to which the carriers from the first and second carrier modulators 4021 and 4022 are inputted, respectively. Alternatively, the optical communication apparatus of the present embodiment may be structured by a carrier multiplexer for multiplexing carriers outputted from the first and second carrier modulators 4021 and 4022 and a single optical sub-modulator for receiving the multiplexed signal from the carrier multiplexer. Like the optical communication apparatus of the third embodiment, this structure requires only a single optical sub-modulator, and therefore more correct demodulation can be achieved with such simple structure.

(Fifth Embodiment)

With reference to FIG. 6, an optical communication apparatus according to a fifth embodiment of the present invention is now described. In FIG. 6, the optical communication apparatus
5 of the present embodiment includes the first and second optical transmitting circuits 1101 and 1102, and the first and second optical receiving circuits 1111 and 1112.

The optical communication apparatus of the present embodiment further includes the optical multiplexer 104 for
10 multiplexing optical signals inputted from the first and second optical transmitting circuits 1101 and 1102, the optical transmission line 105 for transmitting the multiplexed optical signal, and the wavelength separator 106 for separating the optical signal inputted from the optical transmission line 105.
15 Note that, in FIG. 6, components that are identical in structure to those in FIG. 2 are provided with the same reference numerals.

The first and second optical transmitting circuits 1101 and 1102 are identical in structure to those in the second embodiment, and therefore not described herein.

20 The first optical receiving circuit 1111 includes the first optical receiver 1071 for converting the input optical signal into an electrical signal, the first filter 1081 for passing only signal components having a predetermined frequency, a first monitor 11001 for monitoring an input signal from the first
25 optical receiver 1071 to control the first filter 1081, and the

first burst demodulator 1091 for demodulating the passed input signal.

Similarly, the second optical receiving circuit 1112 includes the second optical receiver 1072 for converting the input
5 optical signal into an electrical signal, the second filter 1082 for passing only signal components having a predetermined frequency, a second monitor 11002 for monitoring an input signal from the second optical receiver 1072 to control the second filter 1082, and the second burst demodulator 1092 for demodulating the
10 passed input signal.

The operation of the optical communication apparatus shown in FIG. 6 is now described. The optical communication apparatus of the present embodiment is similar in structure to that of the above second embodiment, and therefore only the difference
15 therebetween is described below.

The first monitor 11001 is provided so as to correspond to the first optical receiver 1071 and the first filter 1081, while the second monitor 11002 is provided so as to correspond to the second optical receiver 1072 and the second filter 1082. These
20 monitors 11001 and 11002 each keep monitoring electrical signals outputted from the corresponding optical receiver. When detecting either one of a first digital modulated signal with a carrier having the frequency f_1 and a second digital modulated signal with a carrier having the frequency f_2 , the first and second
25 monitors 11001 and 11002 each control the corresponding filter

to selectively pass the detected digital modulated signal.

For example, the first and second monitors 11001 and 11002 each keep monitoring the electrical signals outputted from the corresponding optical receiver. When detecting that the
5 corresponding optical receiver receives the optical signal from the first optical transmitting circuit 1101, these monitors 11001 and 11002 each control the corresponding filter to selectively pass the first digital modulated signal with the carrier having the frequency f_1 . On the other hand, when detecting from the
10 second optical transmitting circuit 1102, these monitors 11001 and 11002 each control the corresponding filter to selectively pass the second digital modulated signal with the carrier having the frequency f_2 . With such operation of the first and second monitors 11001 and 11002, the optical receiving circuits can each
15 receive an appropriate signal depending on the optical signal received by the corresponding optical receiver.

Moreover, with the operation of the first and second filters 1081 and 1082, separation and selection of the signals simultaneously inputted from the first and second optical
20 transmitting circuits 1101 and 1102 to a single optical receiving circuit can be achieved.

As stated above, the optical communication apparatus according to the present embodiment is a modification in structure and operation of that according to the second embodiment. The
25 optical communication apparatuses according to the third and

fourth embodiments can be modified in a similar manner.

As described above, according to the present embodiment, the optical receiving circuits each monitor the digital modulated signals intermittently outputted from the optical transmitting
5 circuits to control the corresponding filter. Thus, a more efficient burst optical communication apparatus can be achieved.
(Sixth Embodiment)

With reference to FIG. 7, an optical communication apparatus according to a sixth embodiment of the present invention
10 is now described below. In FIG. 7, the optical communication apparatus of the present embodiment includes the first and second optical transmitting circuits 1101 and 1102, and the first and second optical receiving circuits 1111 and 1112. Note that, in FIG. 7, components that are identical in structure to those in
15 FIG. 2 are provided with the same reference numerals.

The optical communication apparatus of the present embodiment further includes the optical multiplexer 104 for multiplexing optical signals inputted from the first and second optical transmitting circuits 1101 and 1102, the optical
20 transmission line 105 for transmitting the multiplexed optical signal, and the wavelength separator 106 for separating the optical signal inputted from the optical transmission line 105,

The first and second optical transmitting circuits 1101 and 1102 are identical in structure to those in the second embodiment,
25 and therefore not described herein.

The first optical receiving circuit 1111 includes the first optical receiver 1071 for converting the input optical signal into an electrical signal, two first filters 10811 and 10812 for passing only signal components varied in frequency, and two first burst demodulators 10911 and 10912 for demodulating the passed input signal.

Similarly, the second optical receiving circuit 1112 includes the second optical receiver 1072 for converting the input optical signal into an electrical signal, two second filters 10821 and 10822 for passing only signal components varied in frequency, and two second burst demodulators 10921 and 10922 for demodulating the passed input signal.

With reference to FIG. 7, the operation of the optical communication apparatus is now described. The optical communication apparatus according to the present embodiment is similar in structure to that according to the second embodiment, and therefore only the difference is described below.

In the first optical receiving circuit 1111, the first filter 10811 passes the first digital modulated signal having a carrier of the frequency f_1 . The passed signal is demodulated by the first burst demodulator 10911. On the other hand, the other first filter 10812 passes the second digital modulated signal having a carrier of the frequency f_2 . The passed signal is demodulated by the first burst demodulator 10912.

Similarly, In the second optical receiving circuit 1112,

the second filter 10821 passes the first digital modulated signal having a carrier of the frequency f_1 . The passed signal is demodulated by the second burst demodulator 10921. On the other hand, the other second filter 10822 passes the second digital modulated signal having a carrier of the frequency f_2 . The passed signal is demodulated by the second burst demodulator 10922.

Therefore, in the first and second optical receiving circuits 1111 and 1112, two demodulators output demodulated signals that correspond to the first and second optical transmitting circuits 1101 and 1102. With such structure, signals simultaneously inputted from the first and second optical transmitting circuits 1101 and 1102 to a single optical receiver can be both demodulated at the same time.

As stated above, the optical communication apparatus according to the present embodiment is a modification in structure and operation of that according to the second embodiment. The optical communication apparatuses according to the third and fourth embodiments can be modified in a similar manner.

As described above, according to the present embodiment, filters and digital demodulator are provided as many as the optical transmitting circuits. Therefore, the burst optical communication apparatus larger in capacity can be achieved.

In the above embodiments, the operation of the optical communication apparatus has been described for a case where two optical transmitting circuits communicate with two optical

receiving circuits. However, the number of optical transmitting and receiving circuits is not limited to the above, and may be more. Furthermore, the optical transmitting circuits are not necessarily equal in number to the optical receiving circuits.

5 In this case, the predetermined frequencies of the carriers for use in generating a digital modulated signals in the optical transmitting circuits should differ from each other, and uniquely correspond to the optical transmitting circuits.

10 Still further, the wavelength of the optical signals transmitted from the optical transmitting circuits should vary based on the optical receiving circuit, and uniquely correspond to the optical receiving circuits. This allows the transmitting side to select the receiving side based on the wavelength, and the receiving side to select the transmitting side based on the
15 carrier frequency.

 Still further, as to all embodiments described above, any types of digital modulated signal can be used in the first and second carrier modulators. Here, frequency modulation and phase modulation are extremely advantageous as a modulation scheme for
20 improving a CNR (carrier-to-noise ratio) on the transmission. To demodulate the modulated signal, however, complicated signal processing is required.

 To avoid the above problem, in the above third and fourth embodiments, signals identical or similar to the carriers used
25 for generating the modulated signal can be provided to the burst

demodulators in the optical receiving circuits. Thus, demodulation can be easily carried out by, for example, synchronous detection of the modulated signals with reference to the provided signals.

- 5 While the invention has been described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

WHAT IS CLAIMED IS:

1. An optical communication apparatus for transmitting an intermittent optical signal from a transmitting side to a receiving side by using wavelength information of the optical signal as an address, the apparatus comprising:

5 m (m is a natural number not less than 2) optical transmitting circuits for sending the intermittent optical signal;

 n (n is a natural number not less than 2) optical receiving circuits for receiving the optical signal from each of said
10 optical transmitting circuits; and

 an optical transfer circuit for connecting each of said optical transmitting circuits and each of said optical receiving circuits, wherein

 each of said optical transmitting circuits intermittently
15 sends burst optical signals outputted by taking a provided intermittent signal as an original signal so as to prevent a collision among the burst optical signals,

 said optical transfer circuit multiplexes the burst optical signals outputted from said optical transmitting circuits,
20 separates the multiplexed burst optical signal into optical signals for every predetermined wavelength corresponding to said optical receiving circuits, and individually outputs the separated optical signals from n output ports provided thereto,

and

25 each of said optical receiving circuits converts the optical signal outputted from a corresponding one of said output ports into an electrical signal and intermittently outputs the electrical signal.

2. The optical communication apparatus according to claim 1, further comprising a wavelength traffic manager, wherein

each of said optical transmitting circuits includes a variable wavelength optical modulator for converting the
5 intermittent signal into the burst optical signal, setting a wavelength thereof to any one of n predetermined varying wavelengths corresponding to said optical receiving circuits, and intermittently sending the burst optical signal,

said wavelength traffic manager controls the wavelengths
10 of the burst optical signals sent from said variable wavelength optical modulators so as to prevent the wavelengths from coinciding with one another,

said optical transfer circuit includes

an optical multiplexer for multiplexing the burst
15 optical signals outputted from said optical transmitting circuits and outputs a multiplexed optical signal;

a wavelength separator for separating the multiplexed optical signal inputted from said optical multiplexer into optical signals of the predetermined wavelengths

20 corresponding to said optical receiving circuits, and
individually outputs the separated optical signals from the n
output ports, and

each of said optical receiving circuits includes an optical
receiver for converting the optical signal outputted from the
25 output port corresponding thereto of said wavelength separator
into the electrical signal, and intermittently outputting the
electrical signal.

3. The optical communication apparatus according to claim
1, wherein

each of said optical transmitting circuits includes
a carrier modulator for modulating a carrier having
5 a frequency unique to each of said optical transmitting circuits
with the intermittent input signal to generate a burst modulated
signal, and intermittently outputting the burst modulated signal,
and

a variable wavelength optical modulator for
10 converting the burst modulated signal from said carrier modulator
into a burst optical signal, setting a wavelength thereof to any
one of n predetermined varying wavelengths corresponding to said
optical receiving circuits, and intermittently sending the burst
optical signal,

15 said optical transfer circuit includes
an optical multiplexer for multiplexing the burst

optical signals outputted from said optical transmitting circuits,
and intermittently outputting a multiplexed optical signal;

20 a wavelength separator for separating the
multiplexed optical signal inputted from said optical multiplexer
into optical signals of the predetermined wavelengths
corresponding to said optical receiving circuits, and
individually outputting the separated optical signals from the
n output ports, and

25 each of said optical receiving circuits includes

an optical receiver for converting the optical signal
outputted from the output port corresponding thereto in said
wavelength separator into an electrical signal, and
intermittently outputting the electrical signal,

30 a filter for receiving the electrical signal
intermittently outputted from said optical receiver, selectively
passing any one of said burst modulated signals from said m optical
transmitting circuits based on the received electrical signal,
and outputting the passed burst modulated signal, and

35 a burst demodulator for demodulating the burst
modulated signal intermittently outputted from said filter.

4. The optical communication apparatus according to claim
3, further comprising an optical sub-transmitting circuit,
wherein

said optical sub-transmitting circuit includes

5 a carrier generator for multiplexing reference
carriers that are equal in frequency to and have a predetermined
relation in phase with the carriers unique to said optical
transmitting circuits, and outputting a multiplexed signal,

 an optical sub-modulator for converting the
10 multiplexed signal outputted from said carrier generator into an
optical signal having a predetermined wavelength that is
different from said n predetermined varying wavelengths
corresponding to said optical receiving circuits, and sending the
optical signal,

15 said optical multiplexer multiplexes the burst optical
signals outputted from said optical transmitting circuits and the
optical signal outputted from said optical sub-transmitting
circuit, and outputs a multiplexed optical signal,

 said wavelength separator separates the multiplexed
20 optical signal outputted from said optical multiplexer into
optical signals for each of the predetermined wavelengths
corresponding to said n optical receiving circuits and an optical
signal having a wavelength equal to the wavelength of the optical
signal sent from said optical sub-modulator, and individually
25 outputs the separated optical signals from the n output ports and
a carrier output port provided thereto,

 each of said optical receiving circuits further includes

 an optical sub-receiver for converting the optical
signal outputted from the carrier output port of said wavelength

30 separator into an electrical signal, and outputting the electrical signal, and

a sub-filter for receiving the electrical signal outputted from said optical sub-receiver, selectively passing any one of said m reference carriers based on the received electrical
35 signal, and outputting the passed reference carrier, and

said burst demodulator demodulates the burst modulated signal intermittently outputted from said filter with reference to the reference carrier outputted from said sub-filter.

5. The optical communication apparatus according to claim 4, wherein

said burst modulated signal is generated by any one of frequency modulation and phase modulation.

6. The optical communication apparatus according to claim 5, wherein

said burst demodulator carries out synchronous detection of the burst modulated signal intermittently outputted from said
5 filter with reference to the reference carrier outputted from said filter.

7. The optical communication apparatus according to claim 3, wherein

said carrier modulator modulates the carrier having the

frequency unique to each of said optical transmitting circuits
5 to generate the burst modulated signal and intermittently outputs
the burst modulated signal and the carrier,

each of said optical transmitting circuits further includes
an optical sub-modulator for converting the carrier outputted
from said carrier modulator into an optical signal having a
10 predetermined wavelength that is different from n predetermined
varying wavelengths corresponding to said optical receiving
circuits, and sending the optical signal,

said optical multiplexer multiplexes the burst optical
signals from variable wavelength optical modulator included in
15 each of said optical transmitting circuits and the optical signal
from said optical sub-modulator, and outputs a multiplexed
optical signal,

said wavelength separator separates the multiplexed
optical signal outputted from said optical multiplexer into
20 optical signals for each of the predetermined wavelengths
corresponding to said n optical receiving circuits and an optical
signal having a wavelength equal to the wavelength of the optical
signal sent from said optical sub-modulator, and individually
outputs the separated optical signals from the n output ports and
25 a carrier output port provided thereto,

each of said optical receiving circuits further includes
an optical sub-receiver for converting the optical
signal outputted from the carrier output port of said wavelength

separator into an electrical signal, and outputting the
30 electrical signal, and

a sub-filter for receiving the electrical signal
outputted from said optical sub-receiver, selectively passing any
one of said m reference carriers based on the received electrical
signal, and outputting the passed reference carrier, and

35 said burst demodulator demodulates the burst modulated
signal intermittently outputted from said filter with reference
to the reference carrier outputted from said sub-filter.

8. The optical communication apparatus according to claim
7, wherein

said burst modulated signal is generated by any one of
frequency modulation and phase modulation.

9. The optical communication apparatus according to claim
8, wherein

said burst demodulator carries out synchronous detection
of the burst modulated signal intermittently outputted from said
5 filter with reference to the reference carrier outputted from said
sub-filter.

10. The optical communication apparatus according to
claim 3, wherein

each of said optical receiving circuits further includes

a monitor for monitoring the electrical signal outputted from said
5 optical receiver to determine whether the burst modulated signal
from each of said optical transmitting circuits is present or not,
and, if present, controls said filter to selectively passing a
predetermined burst modulated signal for output.

11. The optical communication apparatus according to
claim 3, wherein

said filter and said burst demodulator are provided as many
as the m optical transmitting circuits in each of said optical
5 receiving circuits, and

each of said filters selectively passes a different one of
the burst modulated signals from said m optical transmitting
circuits, and intermittently outputs the passed burst modulated
signal.

ABSTRACT OF THE DISCLOSURE

First and second carrier modulators 1021 and 1022 each modulate a carrier having each different frequency with a baseband
5 input signal. First and second variable wavelength optical modulators 1031 and 1032 each convert the modulated signal into an optical signal having a first or second wavelength. An optical multiplexer 104 multiplexes the optical signals, and sends a multiplexed signal to an optical transmission line 105. A
10 wavelength separator 106 individually outputs wavelength components of the multiplexed signal. First and second optical receivers 1071 and 1072 each convert these wavelength components into an electrical signal. First and second filters 1081 and 1082 each pass only the signal components of each different frequency.
15 First and second burst demodulators 1091 and 1092 each demodulate the modulated signal. With such structure, a large-capacity optical communication apparatus capable of simultaneously using the same wavelength without requiring wavelength management in optical transmitting circuits can be achieved at low cost.

FIG. 1



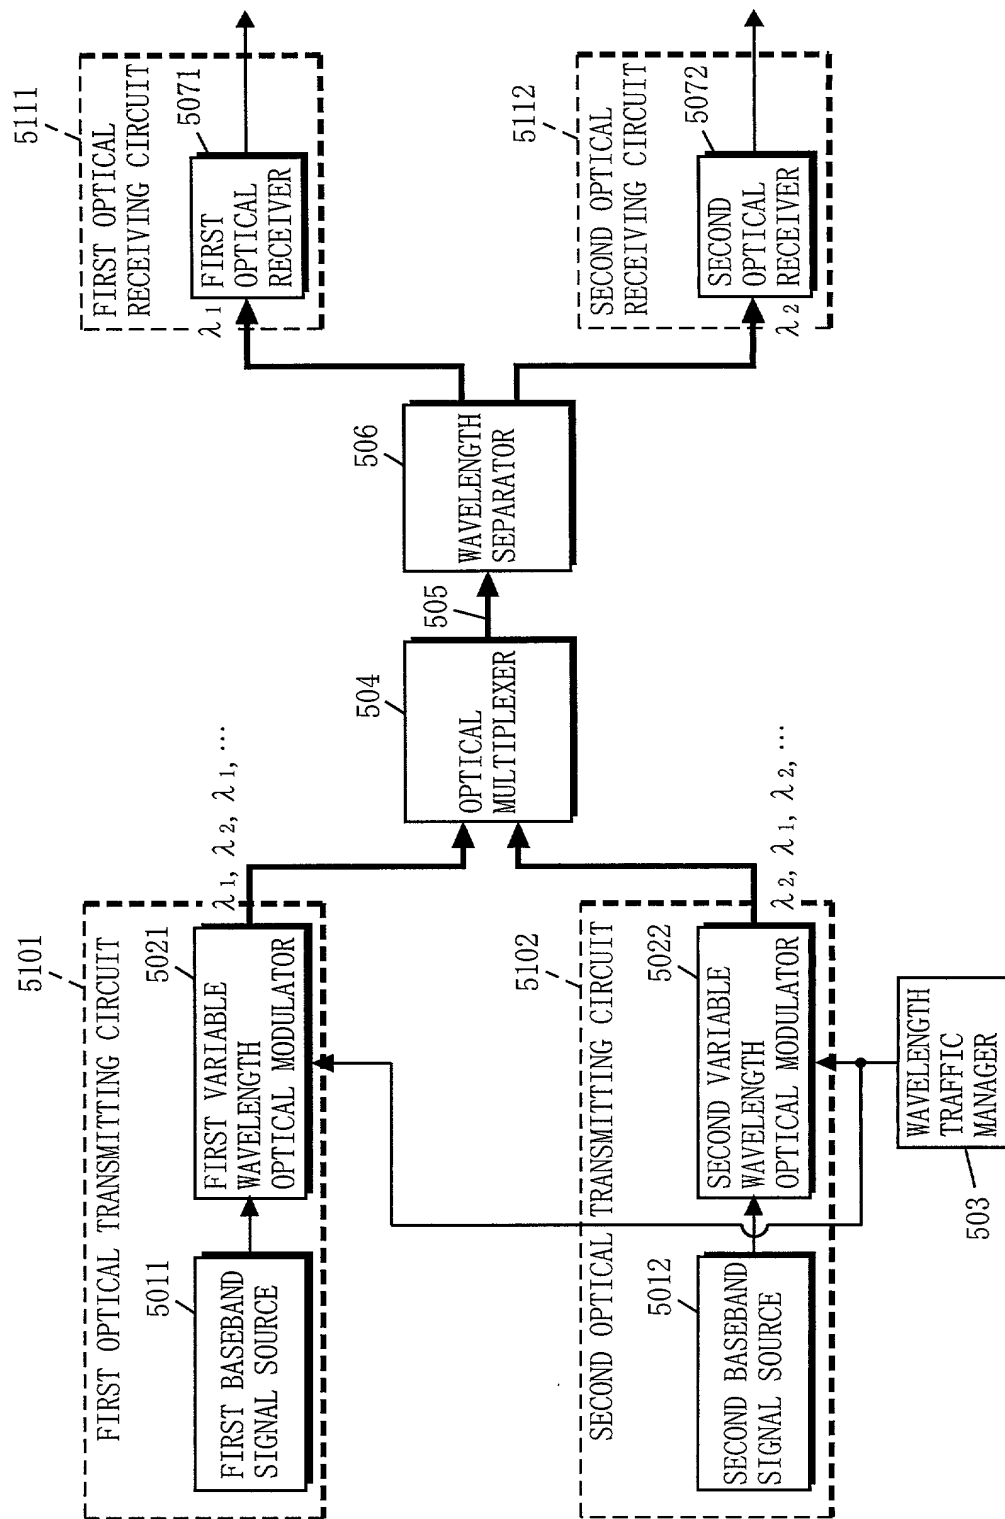


FIG. 2

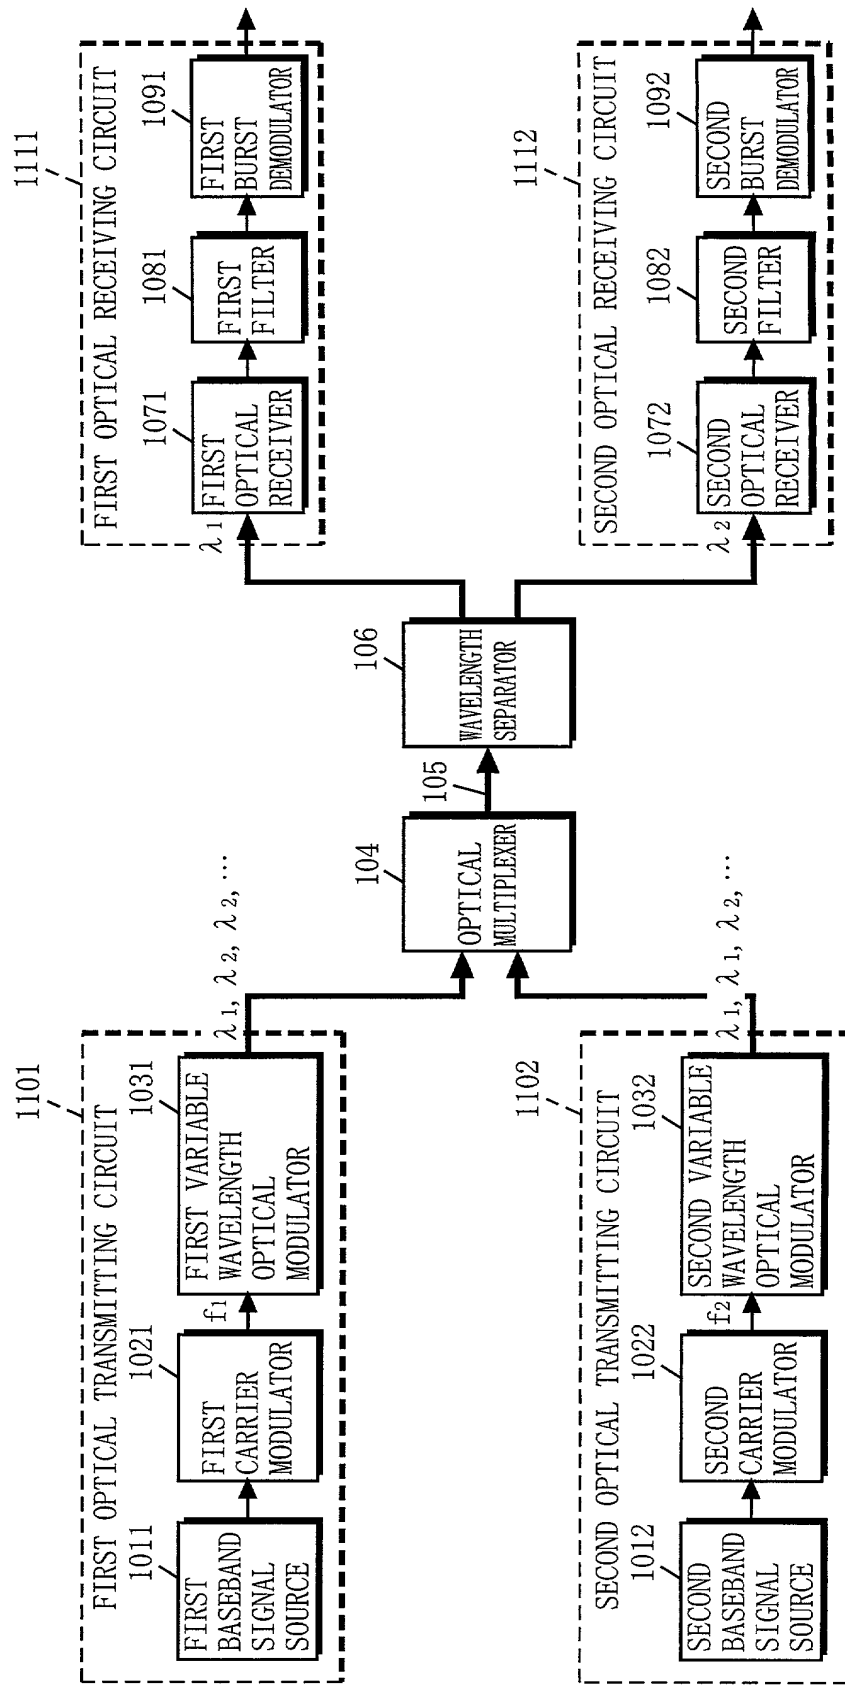


F I G. 3 a




FIRST BURST OPTICAL SIGNAL FROM FIRST VARIABLE
WAVELENGTH MODULATOR

F I G. 3 b



SECOND BURST OPTICAL SIGNAL FROM SECOND VARIABLE
WAVELENGTH MODULATOR

F I G. 3 c



OUTPUT OPTICAL SIGNAL FROM FIRST OUTPUT PORT OF
WAVELENGTH SEPARATOR

F I G. 3 d



OUTPUT OPTICAL SIGNAL FROM SECOND OUTPUT PORT OF
WAVELENGTH SEPARATOR

FIG. 4

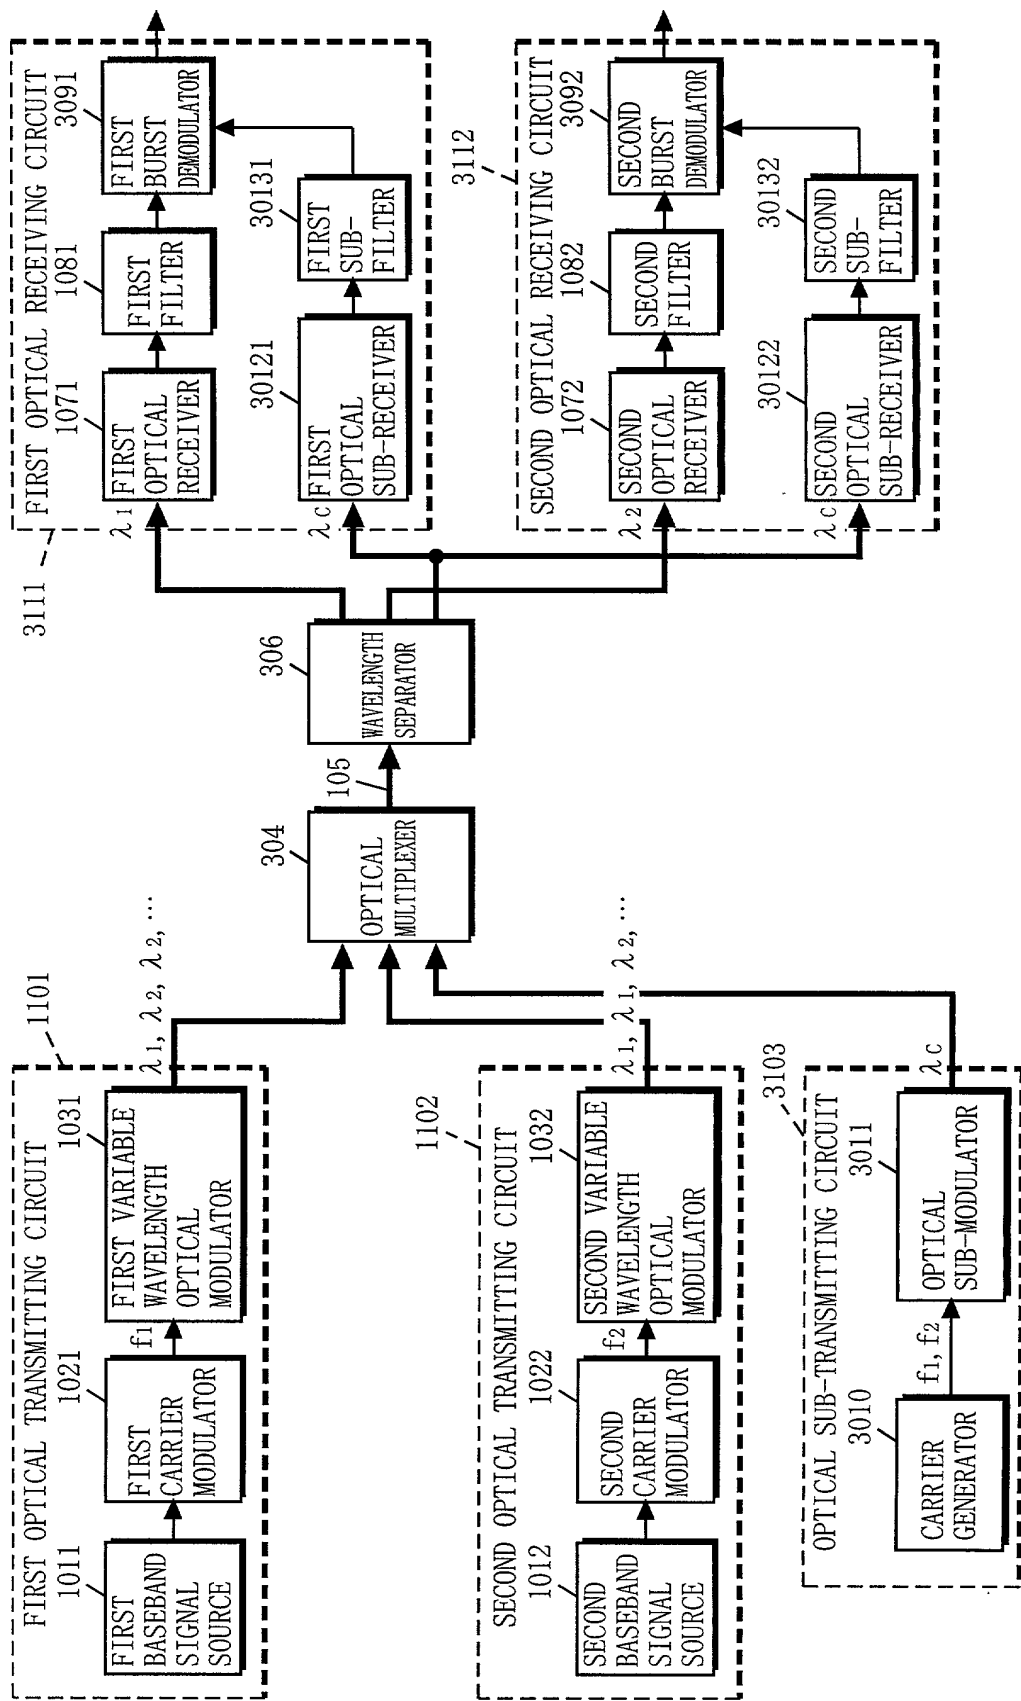


FIG. 5

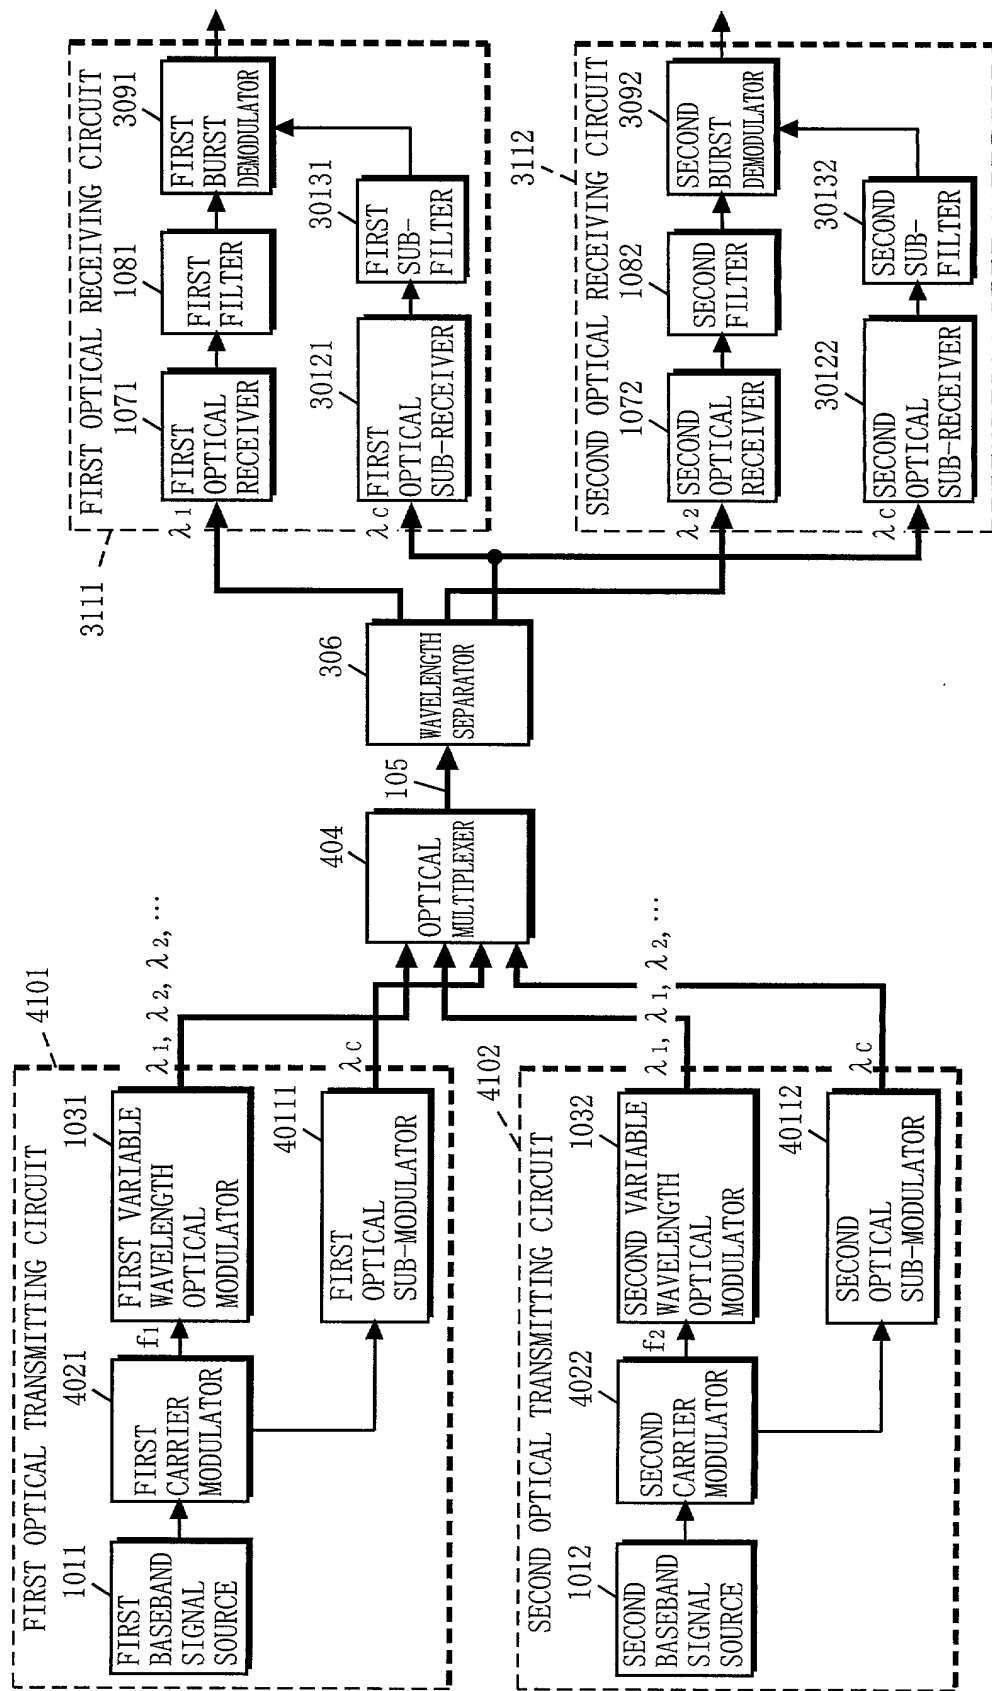


FIG. 6



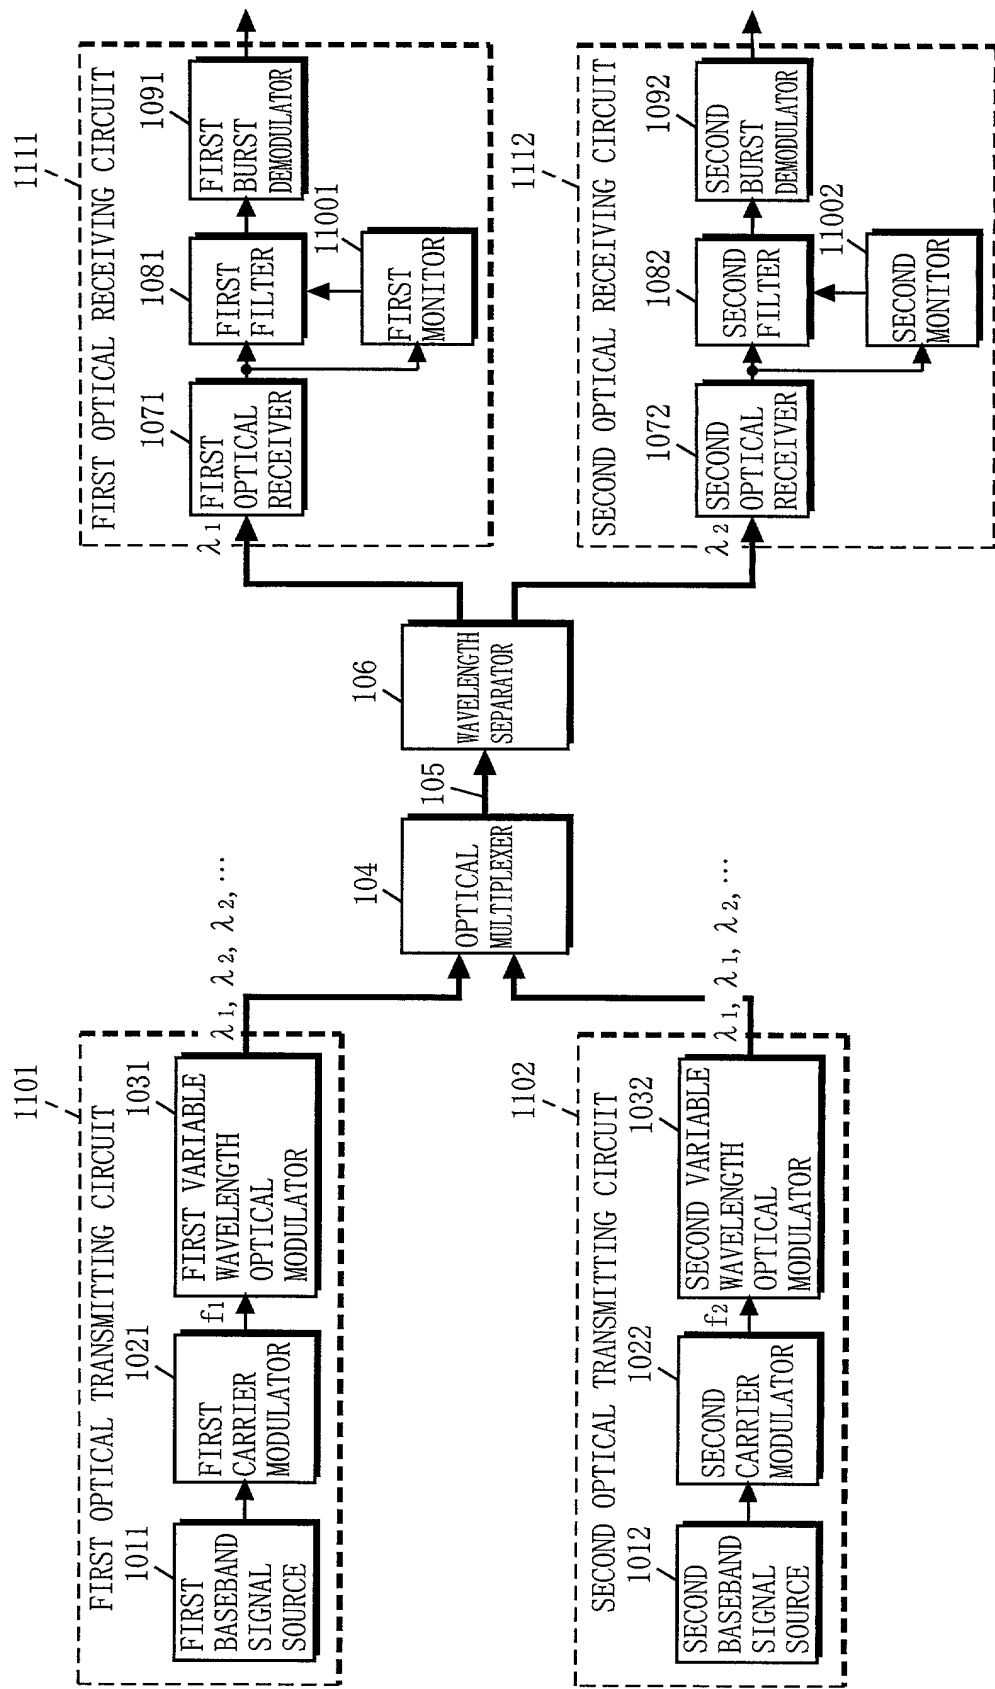


FIG. 7

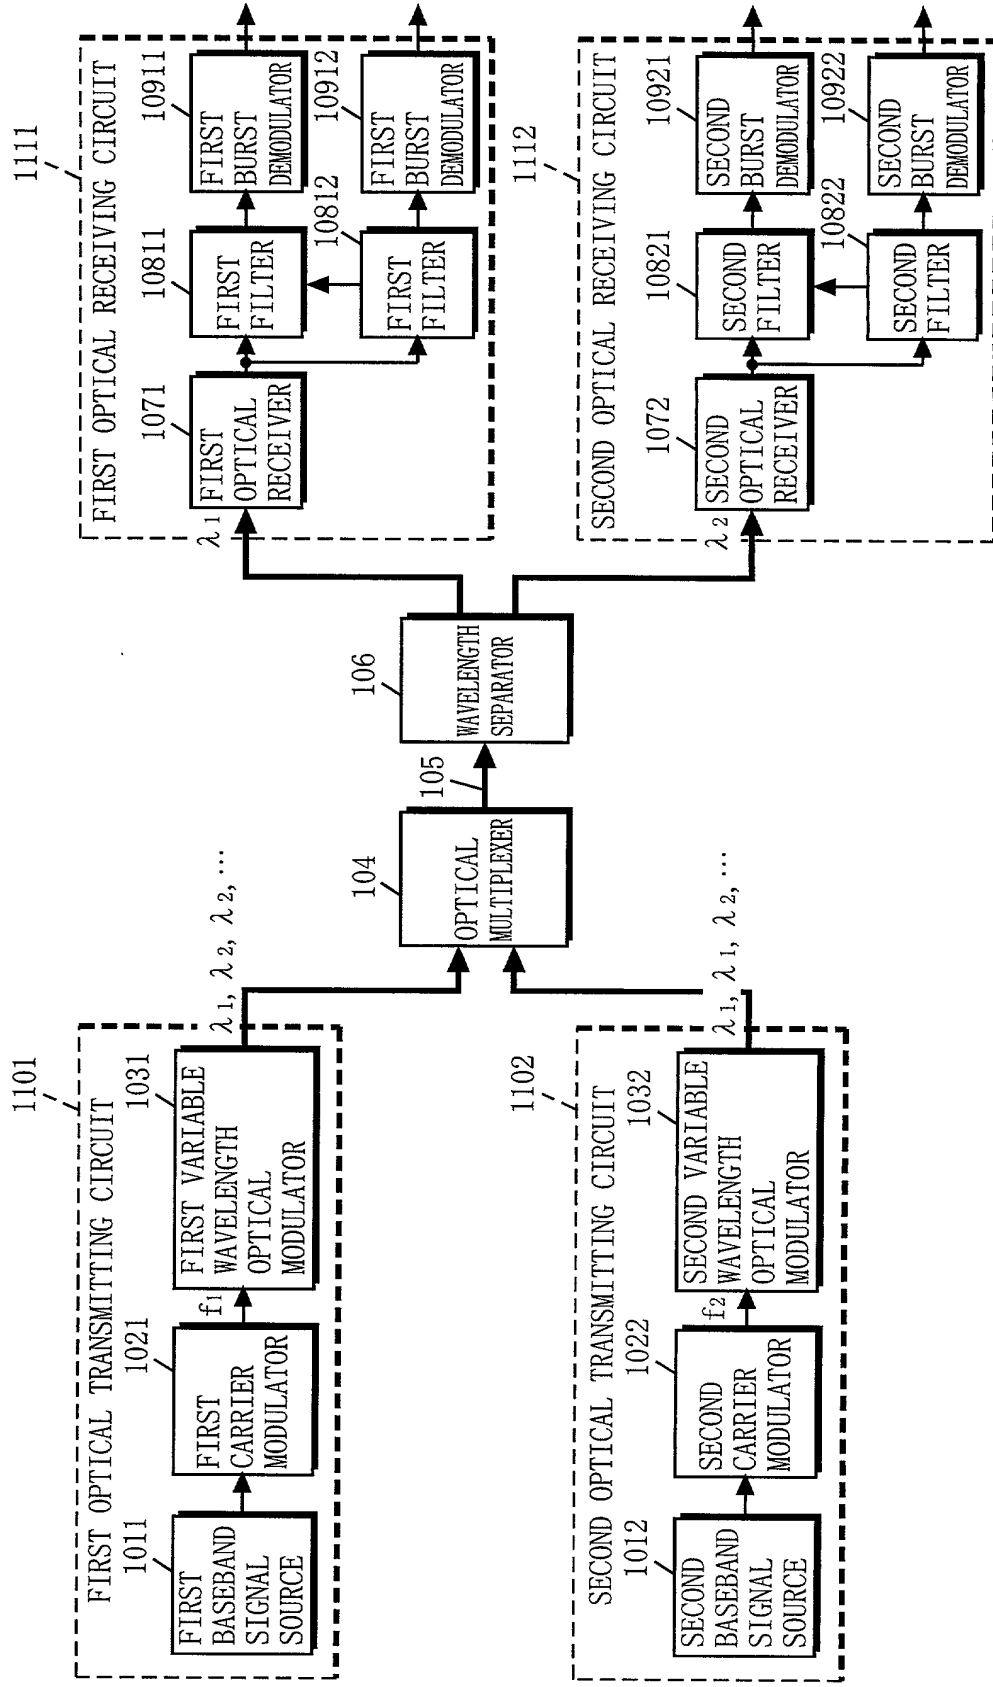

F I G. 8 PRIOR ART

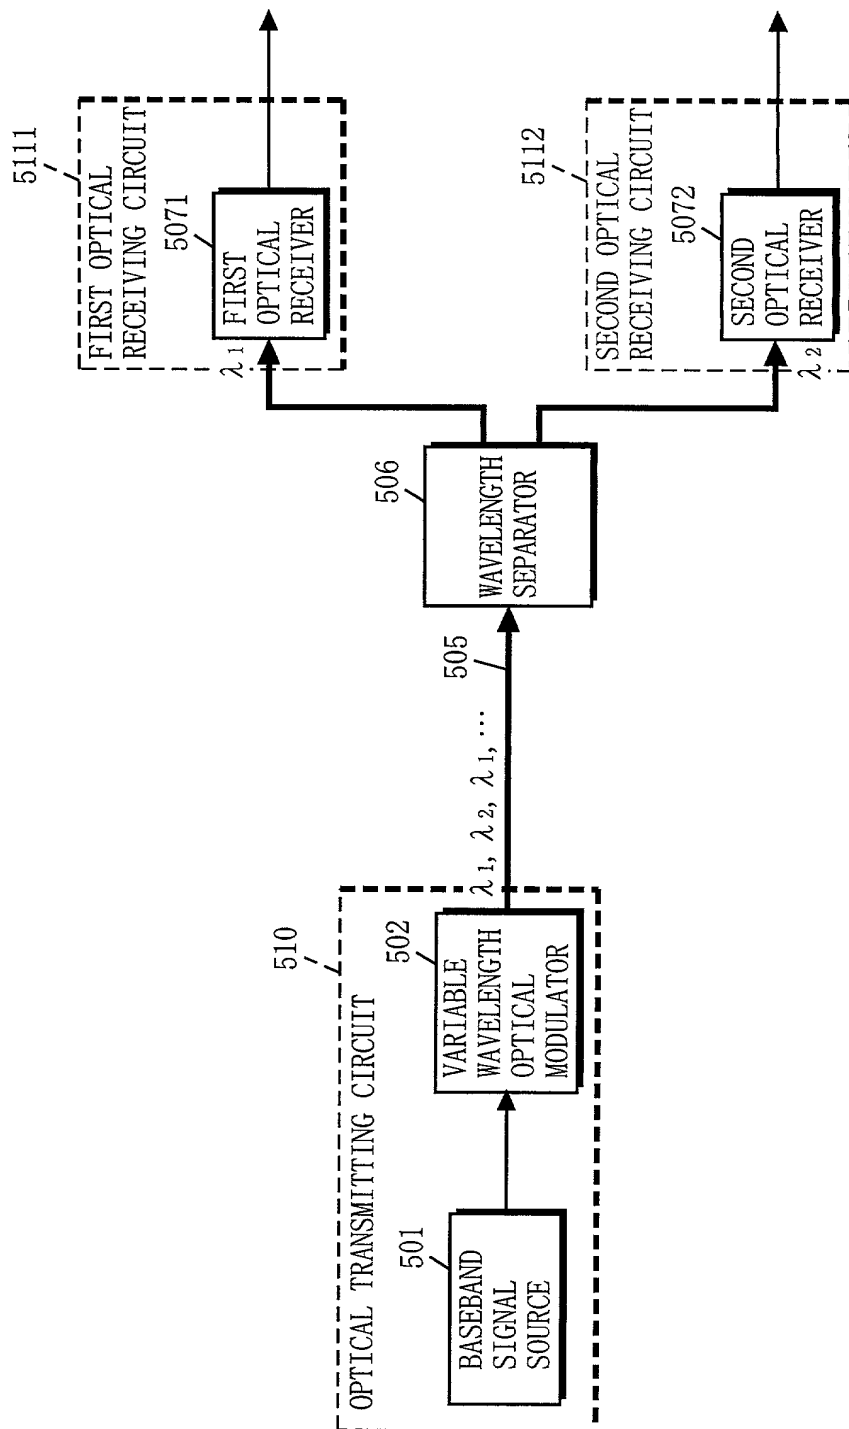

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

(x) Original () Supplemental () Substitute () PCT () Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: BURST OPTICAL COMMUNICATION APPARATUS

of which is described and claimed in:

- (x) the attached specification, or
 () the specification in the application Serial No. _____ filed _____;
 and with amendments through _____ (if applicable), or
 () the specification in International Application No. PCT/ _____, filed _____, and as amended
 on _____ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	310200/1999	October 29, 1999	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint John T. Miller, Reg. No. 21,120; Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145 and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from Ogasawara Patent Office as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, DC 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:
Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME FUSE	FIRST GIVEN NAME Masaru	SECOND GIVEN NAME
Residence & Citizenship	CITY Toyonaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 2-1-58, Higashitoyonaka-cho, Toyonaka-shi, Osaka-fu, Japan	CITY	STATE OR COUNTRY 560-0003
Full Name of Second Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Third Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Fourth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

009207 6859300

Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Seventh Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Masaru Fuse Date October 20, 2000
Masaru FUSE
2nd Inventor _____ Date _____
3rd Inventor _____ Date _____
4th Inventor _____ Date _____
5th Inventor _____ Date _____
6th Inventor _____ Date _____
7th Inventor _____ Date _____

The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date _____
Applicant Reference Number FP-0679 Atty Docket No. _____
Title of Invention BURST OPTICAL COMMUNICATION APPARATUS